





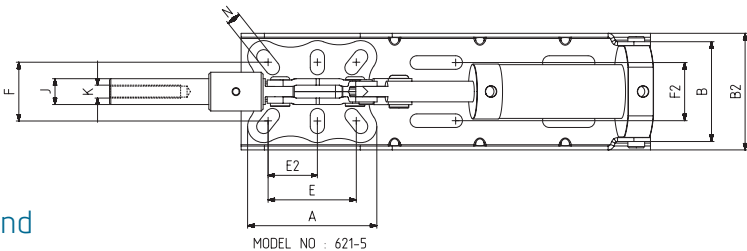

MODEL NO	F1 (N)	F3 (N)	Fi (N)	Vn (dm ³)	STROK	AŽIRLIK (WEIGHT) (gr ±%2)	BAR
621 – 3 (Ø 12)	1500	2960	300	0.25	23	1140	6
621 – 3 (Ø 14)	2500	3200	500	0.51	23	1310	6
621 – 4 (Ø 16)	4500	6650	750	1.04	33	2230	6
621 – 4 (Ø 18)	4500	7200	750	1.04	33	2260	6
621 – 5 (Ø 20)	7500	15000	1100	2	42	3860	6

F1 - F2 : TAŽNÁ SÍLA (EXERTING FORCE) , F3 - F4 : UPÍNACÍ SÍLA (HOLDING CAPACITY) , Fi : UAPLIKOVANÁ SÍLA (APPLIED FORCE)

Vn , 6 BA SPOTŘEBA VZDUCHU dm³ (Vn , AIR CONSUMPTION PER DOUBLE STROKE IN dm³ AT 6 BAR)

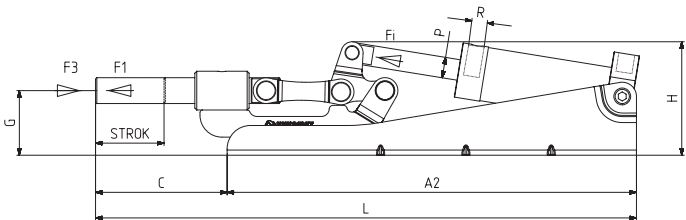


Montážní základna: horizontální

Body Mounting Base: Horizontal With Welding, Tied Behind



Pneumatické válce jsou dvojčinné, magnetické a tlumící.

Pneumatic cylinders are double acting, magnetic and cushioning

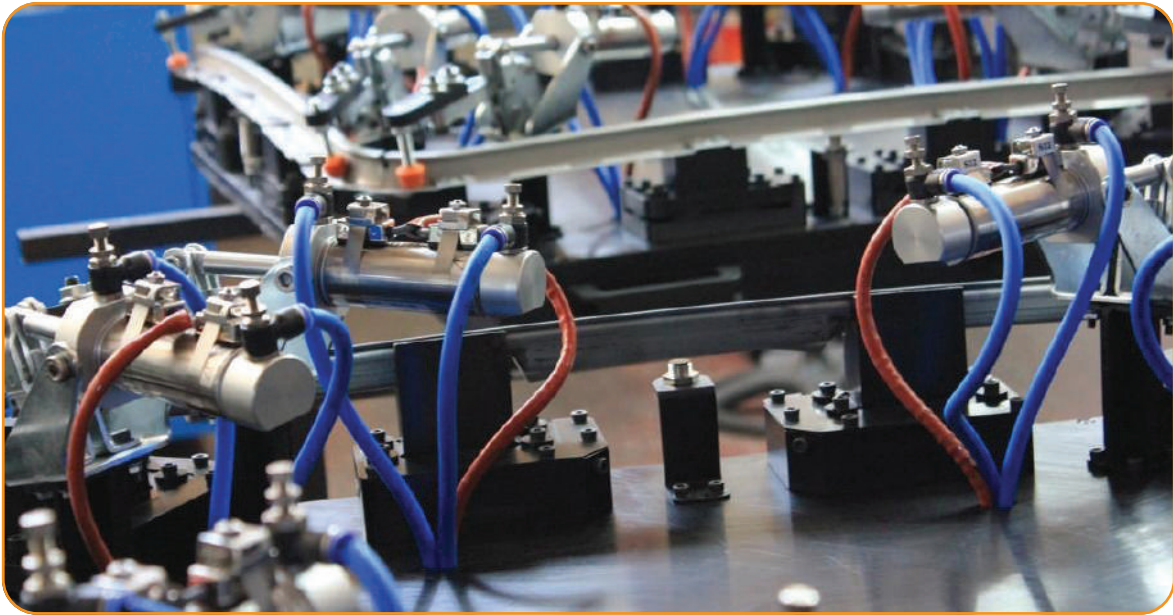

MODEL NO	A	A2	B	B2	C	E	E2	F	F2	G	H	J	K	L	N	P	R	PÍSTON Ø
621 – 3 (Ø 12)	56	226	51	68	70	37	-	38	35	35	65	12	M8	296	7 x 12	Ø 10	G1/8	25
621 – 3 (Ø 14)	56	243	58	68	70	37	-	38	35	35	71.5	14	M8	314	7 x 12	Ø 12	G1/8	32
621 – 4 (Ø 16)	64	289	77	78	84	38,5	-	41	41	43	89	16	M10	375	9,5x13,5	Ø 16	G1/8	40
621 – 4 (Ø 18)	64	289	77	78	84	38,5	-	41	41	43	89	18	M10	375	9,5x13,5	Ø 16	G1/8	40
621 – 5 (Ø 20)	100	355	79	92	101	68	38	45,5	45	51	105	20	M12	460	11 x 22	Ø 20	G1/8	50